Tekcem Tekfoam 5



Tekfoam 5 can be used under a layer of hard flooring such as wood or laminate. It can also be used under a screed in conjunction with a suitable isolating perimeter strip to provide acoustic separation between screed and structure. Tekfoam 5 has been designed to meet the requirements for a resilient layer below a screed in separating floors with either traditional or liquid screeds.

OVERVIEW

Tekfoam 5 is an extruded polyethylene sheet material available in rolls.

Tekfoam 5 has been designed specifically to acoustically "isolate" the transmission of structure borne vibrations (sound) between solid elements. Its closed cell structure is ideal at "cushioning" the vibrations.


Tekfoam 5 has been engineered to comply with Building Regulation requirements for resilient layers in separating floors and can be used with a variety of structures and different screed types.

BENEFITS

- Excellent acoustic performance.
- Very good compression resistance under load.
- Light and easy to handle.
- Easy to install.

MATERIAL

Tekfoam 5 is CFC and HCFC Free	
Density	Approx 30kg/m ³
Roll weight (handling)	Approx 16.9kg per roll
Roll size	1200mm by 93m
Colour	Grey
Thickness	5mm

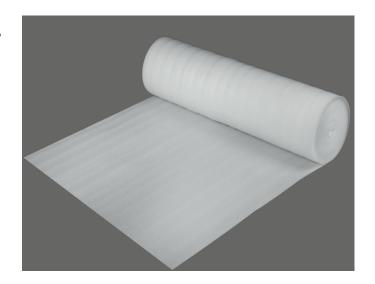

SUBSTRATES

Tekfoam 5 can be applied over any suitably smooth substrate. Care should be taken to ensure that there are no sharp steps or ridges in the substrate and that there are no sharp points or foreign objects such as stones that could provide very localised compression of the material. Such "pinch points" can dramatically reduce the acoustic benefits of Tekfoam 5.

HEALTH AND SAFETY

No protective clothing is necessary to handle Tekfoam 5

WARNING

The information provided in this datasheet corresponds to the best of our expert knowledge and experience. Whilst it is true and accurate to the best of our knowledge, it may contain information which is unsuitable under certain circumstances since materials, site conditions and method of application vary with each application. Tekcem Ltd cannot be held be responsible for any loss or damage due to incorrect use or from the possibility of variations in working conditions and/or workmanship beyond our control. The user alone is responsible for any consequences deriving from the product.

SETTING NEW LEVELS

The Screed Development Centre Unit 5 The Business Centre, Barlow Drive, Winsford, Cheshire CW7 2GN Sales: 03300 555 227 Technical: 03300 553 714